

1. 1-H35...-1 Technical data:


Technical data	Unit	H35
额定载荷 Emax (Max. capacity)	lbs	500,1K,2.5K,4K,5K
灵敏度 (Sensitivity)	mV/V	3.0
灵敏度误差 (Sensitivity tolerance)	mV/V	±0.00300
温度对零点影响 (TC Zero) (Temperature effect on on output)	% of Cn/10K	±0.0140
温度对灵敏度影响 (TC Span) (Temperature effect on on output)	% of Cn/10K	±0.0170
非线性误差 (Non-linearity)	% of Cn	±0.0170
滞后误差 (Hysteresis error)	% of Cn	±0.0170
蠕变及蠕变恢复 (30mins) (Creep、MDLR)	%/30min	±0.0300
零点平衡 (Zero balance)	mV/V	0±0.03
输入电阻 (Input resistance)	Ω	>350
输出电阻 (Output resistance)	Ω	350±2
参考电压 (Nominal Excitation Voltage)	V	5
最大工作电压 (Maximum Excitation Voltage)	V	15
绝缘电阻 (Insulation resistance)	G Ω/100V	>5
额定温度范围 (Compensated temperature rang)	°C	-10~+40
工作温度范围 Service temperature range	°C	-30~+70
存储温度范围 Storage temperature range	°C	-50~+85
安全承载 (Safe load limit)	% of Emax	150
极限侧载 (Lateral load limit)	% of Emax	100
破坏载荷 (Breaking load)	% of Emax	300
最大载荷下变形量 (Deflection at Max. capacity), approx.	mm	0.5
重量 (Weight, approx)	kg	0.9
保护等级 (IP)		IP68
Material: 弹性体 (Measuring element) 电缆连接 (Cable fitting) Cable-sheath		Stainless steel Stainless steel/Sealing:Viton PVC



2. 1-H35...-1 Part Number Description

Part Number	Description	Detailed description
1-H35AN5/500-1	H35-500-20760	HERMETIC L/C, 500, 3MV/V, 1/2-20 THD
1-H35BN5/500-1	H35-500-20763	HERMETIC L/C, 500, 3MV/V, 1/2-20 REV THD
1-H35AN5/1K-1	H35-1K-20760	HERMETIC L/C, 1K, 3MV/V, 1/2-20 THD
1-H35BN5/1K-1	H35-1K-20763	HERMETIC L/C, 1K, 3MV/V, 1/2-20 REV THD
1-H35AN5/2.5K-1	H35-2.5K-20760	HERMETIC L/C, 2.5K, 3MV/V, 1/2-20 THD
1-H35BN5/2.5K-1	H35-2.5K-20763	HERMETIC L/C, 2.5K, 3MV/V, 1/2-20 REV THD
1-H35AN5/4K-1	H35-4K-20760	HERMETIC L/C, 4K, 3MV/V, 1/2-20 THD
1-H35BN5/4K-1	H35-4K-20763	HERMETIC L/C, 4K, 3MV/V, 1/2-20 REV THD
1-H35AN5/5K-1	H35-5KSE-20760	HERMETIC L/C, 5K, 3MV/V, 1/2-20 THD
1-H35BN5/5K-1	H35-5KSE-20763	HERMETIC L/C, 5K, 3MV/V, 1/2-20 REV THD


DATA SHEET

3. 1-H35...-1 Mounting dimension:

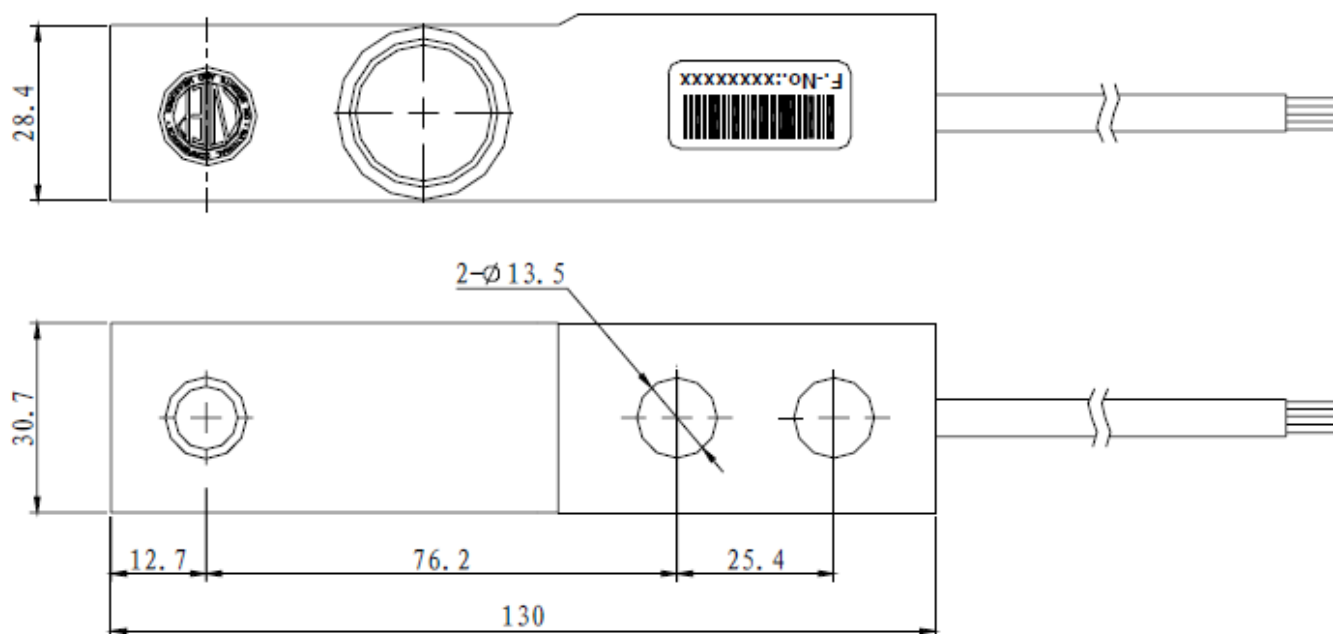

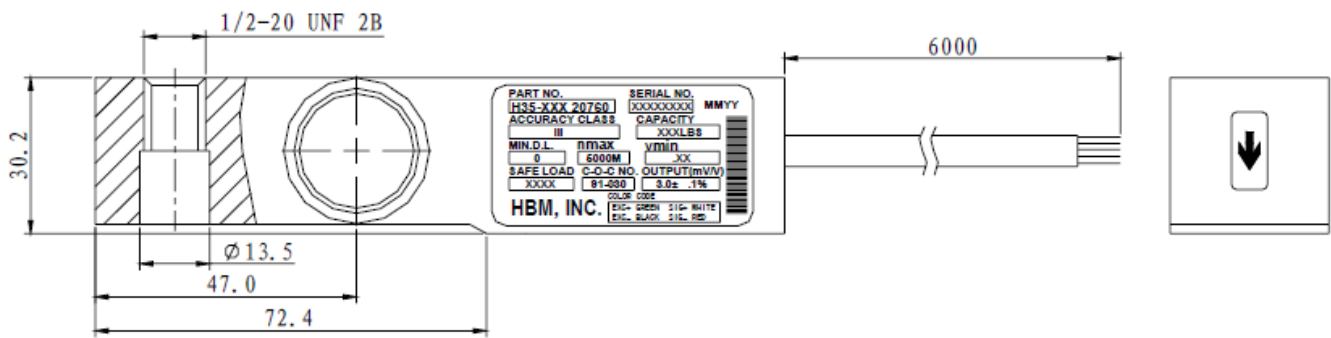

H35-500-5KSE-20760



H35-500-5KSE-20763

Cable:


Shielded 4-core round cable(19/0.127mm) with PVC-jacket

Wiring code:

- Excitation voltage + : green
- Signal+ : white
- Signal - : red
- Excitation voltage - : black
- Shield: Yellow, floating

4. Label:

4.1 Type label

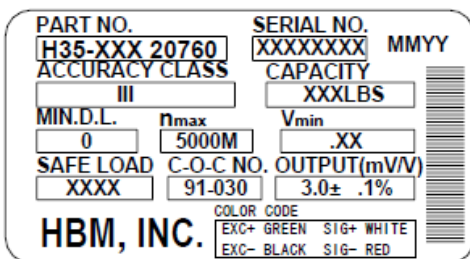

H35-XXX-20760 . H35-XXX-20763



Libracom
Inteligência em Processos Industriais



www.libracom.com.br




51 3458.1028




Rua Lageado, 144 - Centro - Esteio/RS - CEP 93260-190

Type	PART NO.	CAPACITY	vmin	SAFE LOAD
H35-500-20760	H35-500 20760	500	.05	750
H35-500-20763	H35-500 20763	500	.05	750
H35-1K-20760	H35-1K 20760	1K	.10	1500
H35-1K-20763	H35-1K 20763	1K	.10	1500
H35-2.5K-20760	H35-2.5K 20760	2.5K	.25	3750
H35-2.5K-20763	H35-2.5K 20763	2.5K	.25	3750
H35-4K-20760	H35-4K 20760	4K	.40	6000
H35-4K-20763	H35-4K 20763	4K	.40	6000
H35-5KSE-20760	H35-5KSE 20760	5K	.50	7500
H35-5KSE-20763	H35-5KSE 20763	5K	.50	7500



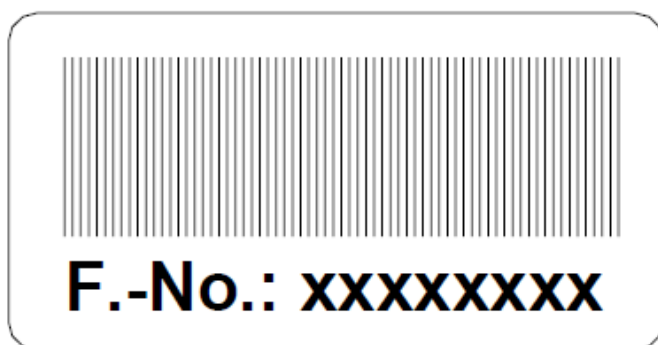

4.2 Serial number label

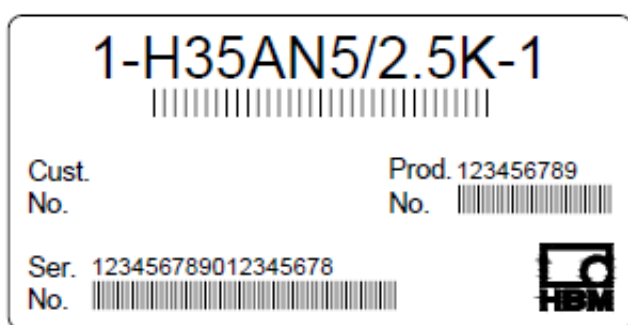

4.3 Individual package label



4.4 Outer package label

Hottlinger Baldwin Measurement (Suzhou) Ltd. 108 Hengshan Road, Suzhou Jiangsu, P.R. China 215009		
<h1>1-H35AN5/2.5K-1</h1>		
		
TYPE: H35-2.5K-20760		
PCS	1234	<div style="border: 1px solid black; width: 100px; height: 100px; margin: 0 auto; display: flex; align-items: center; justify-content: center;"> SEAL </div>
		
PO	1234567890	
No.		
PACKING DATE: YYYY-MM-DD		

Order P/N	Type
1-H35AN5/500-1	H35-500-20760
1-H35BN5/500-1	H35-500-20763
1-H35AN5/1K-1	H35-1K-20760
1-H35BN5/1K-1	H35-1K-20763
1-H35AN5/2.5K-1	H35-2.5K-20760
1-H35BN5/2.5K-1	H35-2.5K-20763
1-H35AN5/4K-1	H35-4K-20760
1-H35BN5/4K-1	H35-4K-20763
1-H35AN5/5K-1	H35-5KSE-20760
1-H35BN5/5K-1	H35-5KSE-20763

